

luminous flux:	10000 lm	7000 lm
maximum power:	100W	60W
rated voltage:	12÷24V DC	
permissible voltage:	10,5÷30V DC	
current at 13,2V:	8A	4,5A
current at 28V:	3,5A	2,1A
maximum current:	10A	5,5A
colour temperature:	5500÷6000K	
beam:	spot	
beam angle:	4°	
IP rating:	IP67, IP69K	
work temperature:	-40°C ÷ 80°C	
housing's material:	aluminium	
lens' material:	plastic, glass	
corrosion resistance:	ISO 9227, 500h	
vibration resistance:	15,3G 24÷2000Hz	
EMC Class CISPR 25:	III	
built-in connectors:	Deutsch DT, AMP SuperSeal 1,5	
other:	protection: - against overheating - against reverse polarisation	



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.




The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

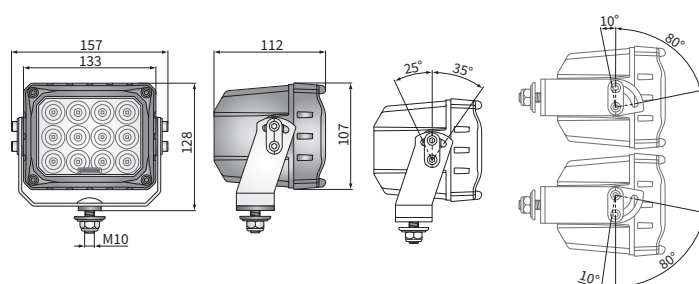

Cat. number	Luminous flux		IP rating	IP67	IP69K	Type of bracket		Lens material	plastic	glass	Additional options	heated lens	Color of the grille	metallic	black	Accessories	LED module 12V÷24V cable 0,5 m	Connectors	Deutsch DT	AMP SuperSeal 1,5
	10000 lm	7000 lm				bottom	rear													
CRP3F.61000	✓			✓	✓	✓		✓						✓			✓			
CRP3F.61001	✓			✓	✓	✓		✓						✓			✓			
CRP3F.61030	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61031	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61025	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61026	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61020	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61021	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61050	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61051	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61080	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61081	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61075	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61076	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61070	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3F.61071	✓			✓	✓	✓	✓	✓						✓			✓			

Cat. number	Luminous flux		IP rating	IP67	IP69K	Type of bracket		Lens material	plastic	glass	Additional options	heated lens	Color of the grille	metallic	black	Accessories	LED module 12V÷24V cable 0,5 m	Connectors	Deutsch DT	AMP SuperSeal 1,5
	10000 lm	7000 lm				bottom	rear													
CRP3C.57600	✓			✓	✓	✓		✓						✓			✓			
CRP3C.57601	✓			✓	✓	✓		✓						✓			✓			
CRP3C.57630	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57631	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57625	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57626	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57620	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57621	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57650	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57651	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57680	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57681	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57675	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57676	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57670	✓			✓	✓	✓	✓	✓						✓			✓			
CRP3C.57671	✓			✓	✓	✓	✓	✓						✓			✓			