

TECHNICAL DATA / FEATURES

dimensions:	Ø87x72
luminous flux of the LED module:	2000 lm, 1500 lm, 1000 lm
luminous flux of the lamp:	1600 lm, 1200 lm, 800 lm
maximum power:	21W, 18W, 14.5W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
source of light:	4 x LED
colour temperature:	5700-7000K
light distribution angle:	35°, 58°
IP rating:	IP67, IP69K
work temperature:	-40°C - +80°C
housing's material:	aluminium
lens' material:	plastic
built-in connectors:	-
other:	protection:
	• against overheating
	• against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135


AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:

neodymium magnet Ø66/230N (1 pc.) - cat. No. CAR4.51315

DIMENSIONS

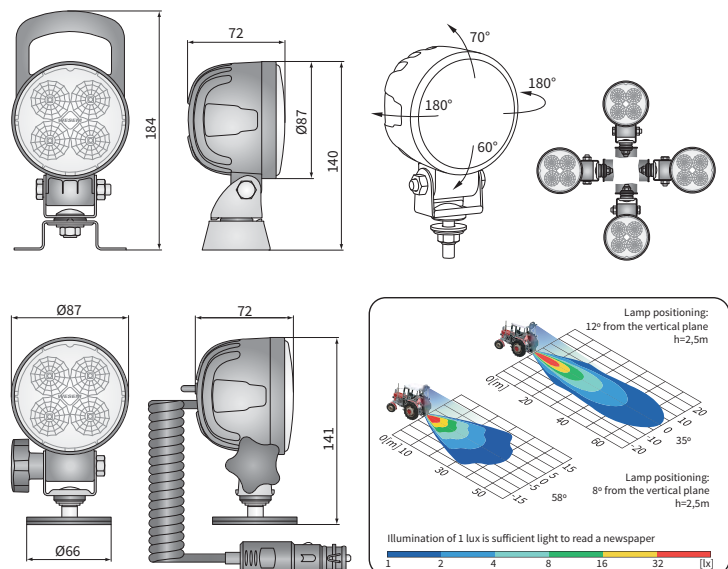

Cat. number	Luminous flux	2000 lm	1500 lm	1000 lm	Beam angle	58°	35°	Accessories	LED module 12V-24V	omega bracket	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
CRC5K.54853	✓						✓		✓													
CRC5K.54854	✓						✓		✓													
CRC5K.54856	✓						✓		✓													
CRC5H.53352	✓					✓			✓													
CRC5H.53353	✓					✓			✓													
CRC5H.53356	✓					✓			✓													
CRC5B.50021		✓					✓		✓	✓												
CRC5B.50053			✓				✓		✓													
CRC5B.50054				✓			✓		✓													
CRC5B.50056				✓			✓		✓													
Cat. number	Luminous flux	2000 lm	1500 lm	1000 lm	Beam angle	58°	35°	Accessories	LED module 12V-24V	omega bracket	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
CRC5D.51652			✓				✓		✓													
CRC5D.51653				✓			✓		✓													
CRC5D.51656							✓		✓													
CRC5A.49454							✓		✓													
CRC5A.49453							✓		✓													
CRC5A.49455							✓		✓													
CRC5A.49456							✓		✓													
CRC5C.51530							✓		✓													
CRC5C.51552							✓		✓													
CRC5C.51553							✓		✓													
CRC5C.51556							✓		✓													