

BATTERYcharge 908



StartStop compatible

Protects batteries in cold temperatures



Winter mode

Protects batteries in cold temperatures



9-stage charging cycle

For easy charging of Lead Acid/AGM batteries



Smart battery charger and maintainer with multi-stage charging cycle

The OSRAM BatteryCharger 908 is a 8A smart charger and battery maintainer for 12V and 24V vehicles including most cars, vans and small trucks. Maintains and charges a vehicle's battery through a 7 stage charging cycle at the touch of a button for Lithium batteries, with only a 9-stage cycle of Lead Acid/AGM batteries. Includes a backlit LCD digital display to keep things easy even in low light. A host of safety features including reverse polarity and short-circuit protection, keeps both the user and the vehicle safe. Be sure that the charger is maintaining your car battery as it automatically changes to long-term maintenance mode when the vehicle's battery is full.

Technical data


Product information

| | |
|-----------------------|-----|
| Stop/Start Compatible | Yes |
|-----------------------|-----|

Electrical data

| | |
|-----------------------------------|--------|
| Charge Rate (Up to) | 8.0 A |
| Maintainance Charge (up to) | 4.0 A |
| Max battery size for charging 12V | 150 Ah |
| Max battery size for charging 24V | 70 Ah |

Dimensions & weight

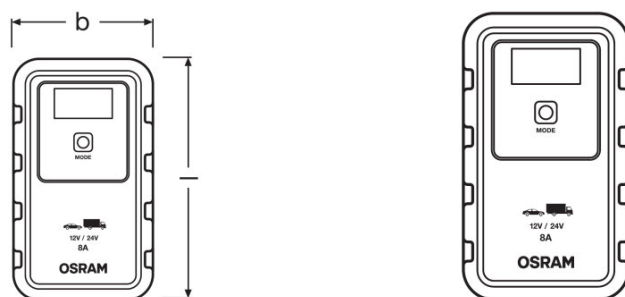

| | |
|---------------------|-------|
| Power Cable Length | 1.5 m |
| Clamps Cable Length | 1.5 m |

Additional product data

| | |
|-------------------------|--|
| Recommended to Use With | Motorcycle, Car, SUV, Van, Small Truck |
| Stages: Lead, AGM, EFB | 9 |
| Stages: Lithium | 7 |
| Battery Connection | O-rings, Crocodile Clamps |
| Winter Mode | Yes |

Product datasheet



Detail



Detail




Detail

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4052899620544 | BATTERY charge 908 | Folding carton box 1 | 145 mm x 128 mm x 272 mm | 5.05 dm ³ | 1041.00 g |
| 4052899620629 | BATTERY charge 908 | Shipping carton box 4 | 314 mm x 280 mm x 334 mm | 29.37 dm ³ | 4740.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File | |
|---|--|
|  | Movie application BatteryCharge How to Video (EN) |

Legal advice

*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice:

For more detailed application information and graphics please see product datasheet.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

