

dimensions:	Ø177/169x96		
light functions:	passing	driving	position
function markings:	HC/R		A
traffic:	right-hand		
reference mark:	-	20	-
source of light:	H4		W5W
maximum power:	75/70W		5W
rated voltage:	12÷24V DC		
optics:	FF		
IP rating:	IP54		
housing's material:	plastic, metal		
lens' material:	glass		
other (optional):	hermetic main bulb holder		



To be mounted in factory designed locations or in the front bumper recesses.

Useful parts while installing:

main bulb gasket - cat. No. A.05820

hermetic main bulb holder - cat. No. A.26925


hermetic position bulb holder - cat. No. A.26910

Dedicated application:


A - Ikarus: 180, 190, 211, 260, 263, 266, 280, 284,
 motorcycles MZ: 150, 250, 251,
 Kamaz: 4310, 4326, 5320, 53208, 53212, 53213, 5410, 54112,
 55102, 55105, 5511, 55111, 56212,
 Robur: 2002A, 2500, 2501, 3000, 3001, 3002, 1800A, 1801A,
 2002A, 2500, 2501, 3000, 3001, 3002,
 Volga: GAZ-24-01, GAZ-24-02, GAZ-24-10, GAZ-24-12,
 Trabant: 1.1, P50, P600, P601,
 Zaporozhets: ZAZ-966, ZAZ-968,
 Land Rover Defender (from 1983),
 Lada: Niva 2121, Niva 2131

B - Mercedes G class

W460, W461 (1979-1990), W463 (1990-2005)

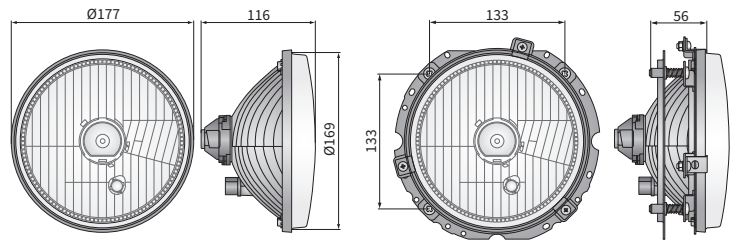

PES4.48953

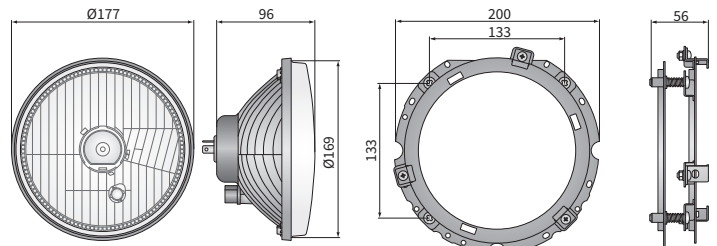

AR.54337

Cat. number	Homologation code	Light functions			Type	H4	Accessories				Side	Application			Packaging / pc	
		passing	driving	position			bulb H4 24V	bulb W5W	bulb gasket	bulb holder IP66		mounting plate	right	left	dedicated	carton box
PES4.48900	070	✓	✓		✓						✓	✓			1	
PES4.48950	070	✓	✓	✓	✓			✓			✓	✓		A	1	
PES4.48953	070	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		B	1	
AR.54337									✓		✓	✓		B	1	