
Introducing the "HALO" by Boreman Ltd.


WITH DUAL POSITION LIGHT IN AMBER AND CLEAR

PART NO.: 1001-2500




Dimensions:






Wiring Protocol:




Beam Pattern:

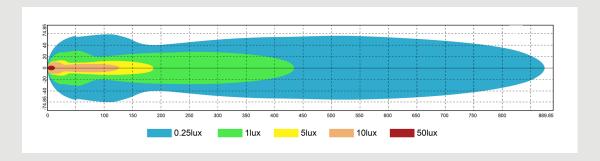

Thermal Plastic Housing with built in heat-sink







Front View

Back View

Side View

Quality Control:

Stringent Tests for Quality Control (Quality of Rate higher than 99.98%)

- 1, High level of EMC standards, CISPR 25 Class 3 / 4 / 5, ISO 13766, ISO 14982, ISO 7637-2
- 2, Salt Spray test for Anti-Corrosion, ISO 9227 240H
- 3, High and Low Temperature tests, GB/T 10485 // GB 4599—2007,
- 4, Vibration Resistance: up to 15.3Grms, frequency 5~2000Hz, impact force: up to 60G.
- 5, Ingress Protection test: IP69K, SAE J1455