

CRC3-FF 4° LED work lamps with standard bracket

TECHNICAL DATA / FEATURES

dimensions: $\phi 117 \times 74$
 luminous flux of the LED module: 2500 lm, 2000 lm, 1500 lm
 luminous flux of the lamp: 2000 lm, 1600 lm, 1200 lm
 maximum power: 29W, 25W, 24W
 nominal voltage: 12V-24V DC
 permissible power supply voltage: 10.5V-30V DC
 source of light: 6 x LED
 colour temperature: 5000-7000K
 light distribution angle: 4°
 IP rating: IP67, IP69K, IP66
 work temperature: -40°C - +80°C
 housing's material: aluminium/plastic
 lens' material: plastic
 built-in connectors: AMP Faston 250, Deutsch DT,
 AMP SuperSeal 1.5
 other: protection:
 • against overheating
 • against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

Equipped with removable protective grille.



The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

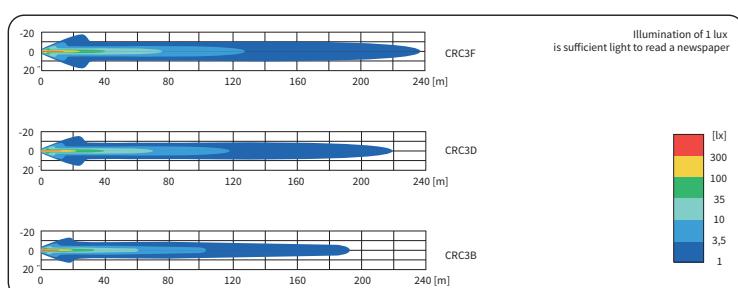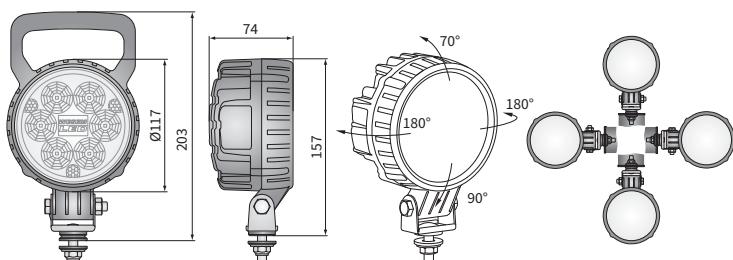

Cat. number	Luminous flux			IP rating	Accessories	Connectors	Cat. number	Luminous flux			IP rating	Accessories	Connectors			
	2500 lm	2000 lm	1500 lm					IP66	IP67	IP69K				AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5
CRC3F.50400	✓			✓	✓	✓		✓	✓	✓		✓	✓	✓	✓	✓
CRC3F.50480	✓	✓														
CRC3F.50406	✓															
CRC3F.50407	✓															
CRC3F.50408	✓															
CRC3F.50410	✓															
CRC3F.50481	✓															
CRC3F.50494	✓															
CRC3F.50416	✓															
CRC3F.50417	✓															
CRC3F.50418	✓															
CRC3D.50200																
CRC3D.50280																
CRC3D.50206																
CRC3D.50207																
CRC3D.50208																