



TECHNICAL DATA / FEATURES

- dimensions: $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 35°, 58°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: -
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).


Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:

- neodymium magnet $\phi 66/230N$ (1 pc.) - cat. No. CAR4.51315

DIMENSIONS

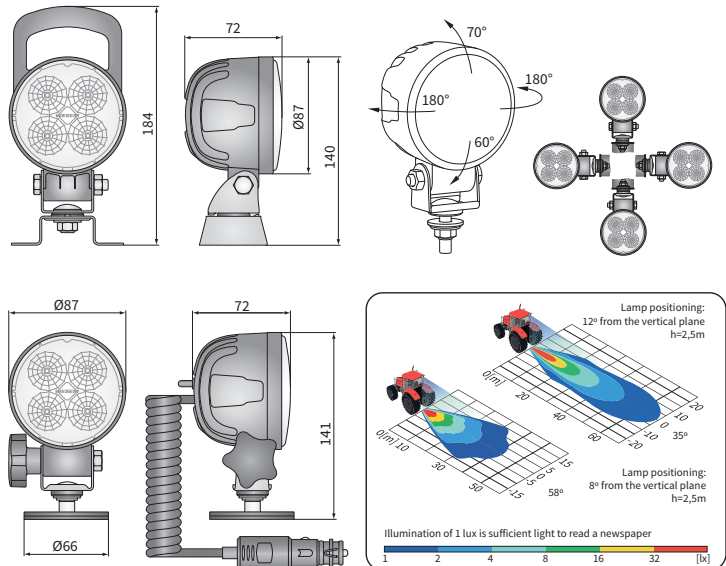

Cat. number	Luminous flux			Beam angle	58°	35°	Accessories								Connectors		
	2000 lm	1500 lm	1000 lm				LED module 12V-24V	omega bracket	handle	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	AMP Faston 250	Deutsch DT
CRC5K.54853	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5K.54854	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5K.54856	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5H.53352	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5H.53353	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5H.53356	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5B.50021		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5B.50053		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5B.50054		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5B.50056		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				

Cat. number	Luminous flux			Beam angle	58°	35°	Accessories								Connectors		
	2000 lm	1500 lm	1000 lm				LED module 12V-24V	omega bracket	handle	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	AMP Faston 250	Deutsch DT
CRC5D.51652		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5D.51653		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5D.51656		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5A.49454			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5A.49453			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	2
CRC5A.49455			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5A.49456			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5C.51530			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5C.51552			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5C.51553			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
CRC5C.51556			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				