



## TECHNICAL DATA / FEATURES

- dimensions:  $\phi 80 \times 96$ ,  $\phi 84 \times 97$
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle:  $40^\circ \times 22^\circ$
- IP rating: IP66, IP69K
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT



## ADDITIONAL INFORMATION

Universal lamps dedicated for small recesses or in places with limited space for installation.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.


Versions with the bracket can be installed on a vehicle in an upright or upside-down position.

It is possible to install needed connectors on wire (on request).

Useful parts while installing:

- AMP Faston 250 plug 2-pin - cat. No. A.07138
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

## DIMENSIONS

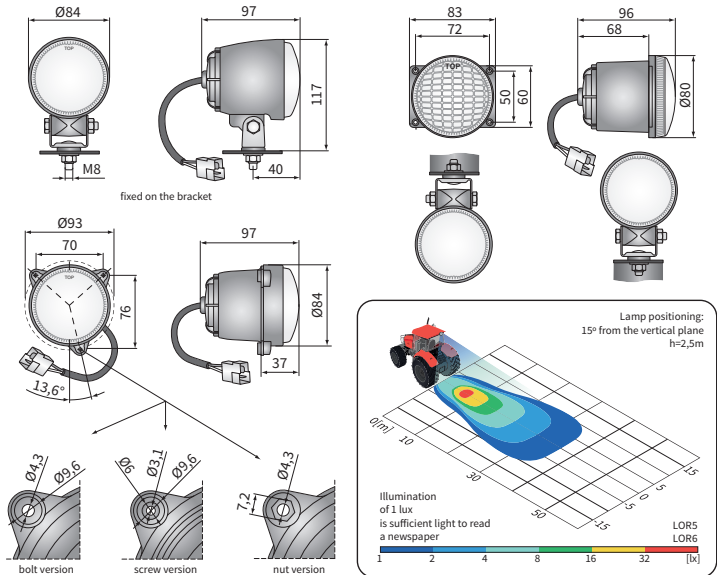

Cat. number	Diameter		Accessories	Mounting method	in recess	installed vertically up	suspended	Bracket	4 bolts	M8	3 bolts	3 screws	3 nuts	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
	$\phi 80$	$\phi 84$																
LOR5.41331	✓				✓			✓						✓				2
LOR5.41332	✓				✓			✓						✓				2
LOR5.41301	✓				✓			✓						✓				2
<b>LOR5.41302</b>	✓				✓			✓						✓				2
LOR5.41341	✓				✓			✓						✓				2
LOR5.41311	✓				✓			✓						✓				2
<b>LOR5.41321</b>	✓				✓			✓						✓				2
<b>LOR6.41506</b>		✓			✓		✓				✓			✓				2
<b>LOR6.41501</b>		✓			✓		✓				✓			✓				2
<b>LOR6.41502</b>		✓			✓		✓				✓			✓				2
LOR6.41509					✓									✓				2
LOR6.41510					✓									✓				2
LOR6.41520					✓									✓				2
<b>LOR6.41522</b>					✓									✓				2
LOR6.41540					✓									✓				2
LOR6.41530					✓									✓				2
LOR6.41529					✓									✓				2
LOR6.41528					✓									✓				2
<b>LOR6.41524</b>					✓									✓				2
LOR6.41523					✓									✓				2