



## TECHNICAL DATA / FEATURES

- dimensions:  $\phi 66 \times 69$
- luminous flux of the LED module: 800 lm
- luminous flux of the lamp: 600 lm
- maximum power: 12W
- nominal voltage: 12V-24V DC, 12V-48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC
- source of light: 2 x LED
- colour temperature: 4700-5700K
- light distribution angle:  $43^\circ \times 34^\circ$
- IP rating: IP67, IP69K
- work temperature:  $-40^\circ\text{C} - +80^\circ\text{C}$
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation
- bracket made of Inox steel



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).





It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

## DIMENSIONS

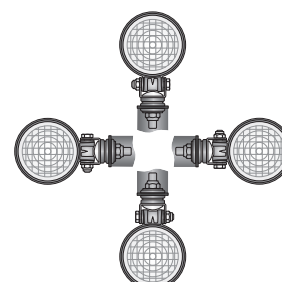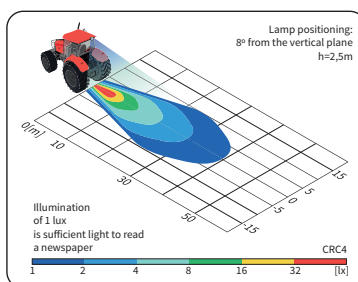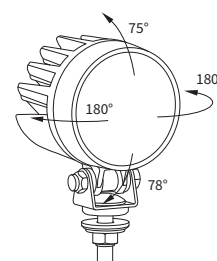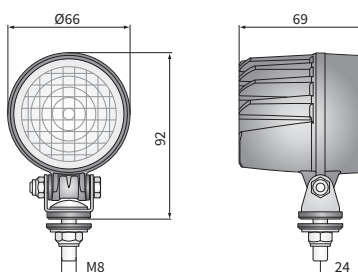

Cat. number	Hella Catal. No.	Luminous flux		Rated power		IP rating			Accessories				Connectors				
		800 lm	600 lm	12W	12W	IP67	IP69K	LED module 12V-24V	LED module 12V-48V	cable 0.5 m	cable 8 m	Bracket	neodymium magn.	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	
<b>CRC4A.51100</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>CRC4A.51150</b>	1G0 995 050-001,011	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2
<b>CRC4A.51160</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2
<b>CRC4A.51180</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>CRC4B.55000</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>CRC4B.55050</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2
<b>CRC4B.55060</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2
<b>CRC4B.55080</b>		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓