



TECHNICAL DATA / FEATURES

- dimensions: 220x123x120
- light function: fog light, driving, parking
- lamp function markings: B, HR, A
- reference mark: 30
- source of light: H3, T4W
- maximum power: 100W
- nominal voltage: 12V-24V DC
- optics: standard
- IP rating: IP56
- housing's material: plastic
- housing's colour: black, chrome-plated
- lens' material: glass
- lens' colour: clear, blue
- mounting: bracket
- built-in connectors: -
- other: stone guard (option)
the mount steel-reinforced



ADDITIONAL INFORMATION

To be mounted at the front of the car or truck. They can be installed in an upright or upside down position.

The bracket parts, in chrome-plated version, are made of Inox steel.

It is possible to install needed connectors on wire (on request).




Additional equipment:

- stone guard - cat. No. A37800
- lens cover - cat. No. A.25581

Replacement parts:

- parking light bulb holder - cat. No. A.05921

DIMENSIONS

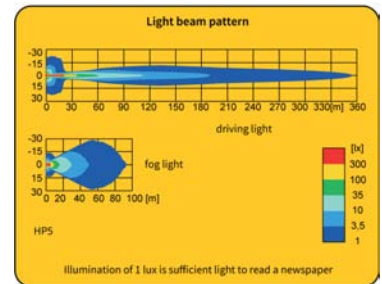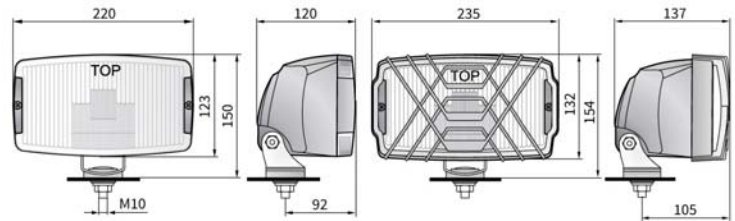

Cat. number	Homologation code	Light function			Lens colour		Housing's colour		Accessories	Connectors		Side	Application				Packaging / pc	
		fog light	driving	parking	clear	blue	black	chrome-plated		AMP Faston 250	AMP Superseal 1.5		Deutsch DT	Cap / Pin	universal	dedicated	blister pack	carton box
HP5.22386	225	✓			✓		✓						✓	✓			1	
HP5.36387	225	✓			✓		✓		✓				✓	✓			1	
HP5.22587	225	✓			✓		✓						✓	✓			1	
HP5.22486	224		✓	✓	✓		✓						✓	✓			1	
HP5.36287	224		✓	✓	✓		✓		✓				✓	✓			1	
HP5.22687	224		✓	✓	✓		✓		✓				✓	✓			1	
HP5.40786	224		✓	✓		✓	✓						✓	✓			1	
HP5.40887	224		✓	✓		✓	✓		✓				✓	✓			1	
HP5.40987	224		✓	✓		✓	✓		✓				✓	✓			1	
HP5.26786	225	✓			✓			✓					✓	✓			1	
HP5.17587	225	✓			✓			✓					✓	✓			1	
HP5.36587	225	✓			✓			✓					✓	✓			1	
HP5.26586	224		✓	✓	✓			✓					✓	✓			1	
HP5.17387	224		✓	✓	✓			✓					✓	✓			1	
HP5.36487	224		✓	✓	✓			✓					✓	✓			1	
HP5.40486	224		✓	✓		✓		✓					✓	✓			1	
HP5.40587	224		✓	✓		✓		✓					✓	✓			1	
HP5.40687	224		✓	✓		✓		✓					✓	✓			1	